

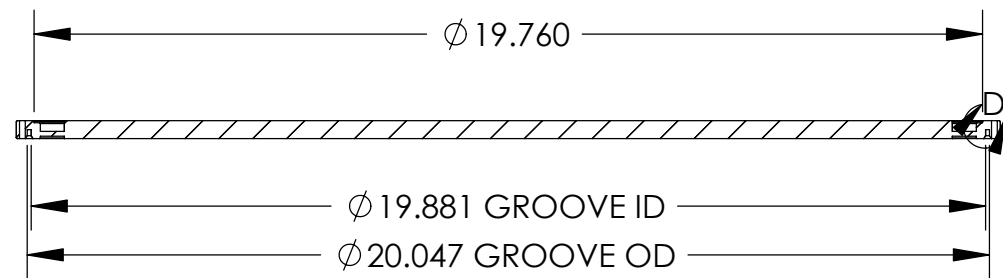
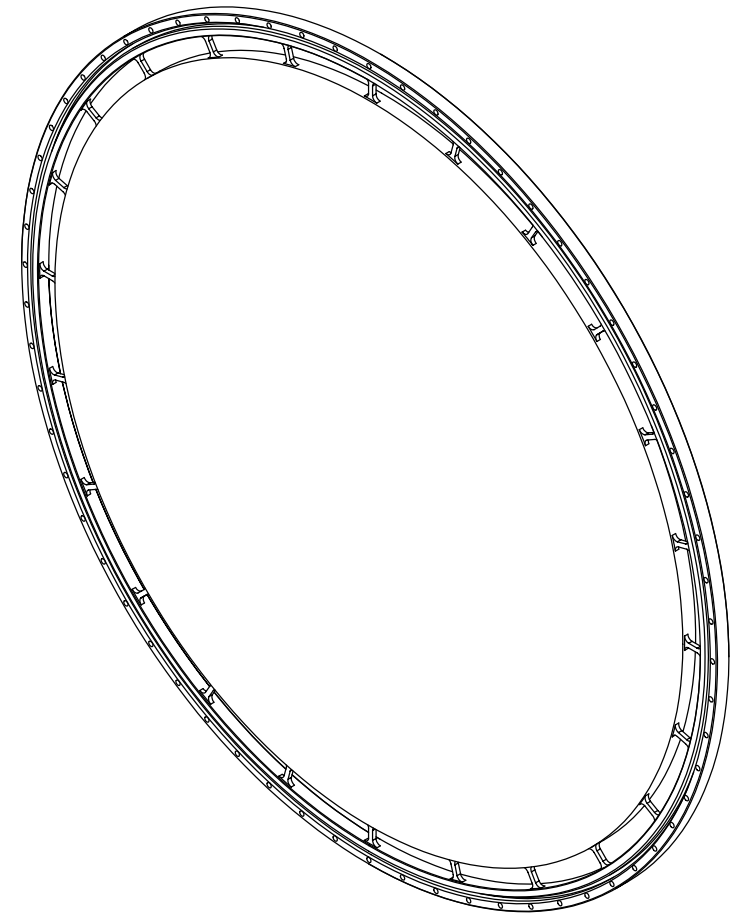


| REVISIONS | | | |
|-----------|-----|--------------------------|-----------|
| ZONE | REV | DESCRIPTION | DATE |
| | B | ADDED WEB | 6/5/2003 |
| | C | CHANGED GROOVE DIAMETERS | 9/25/2003 |

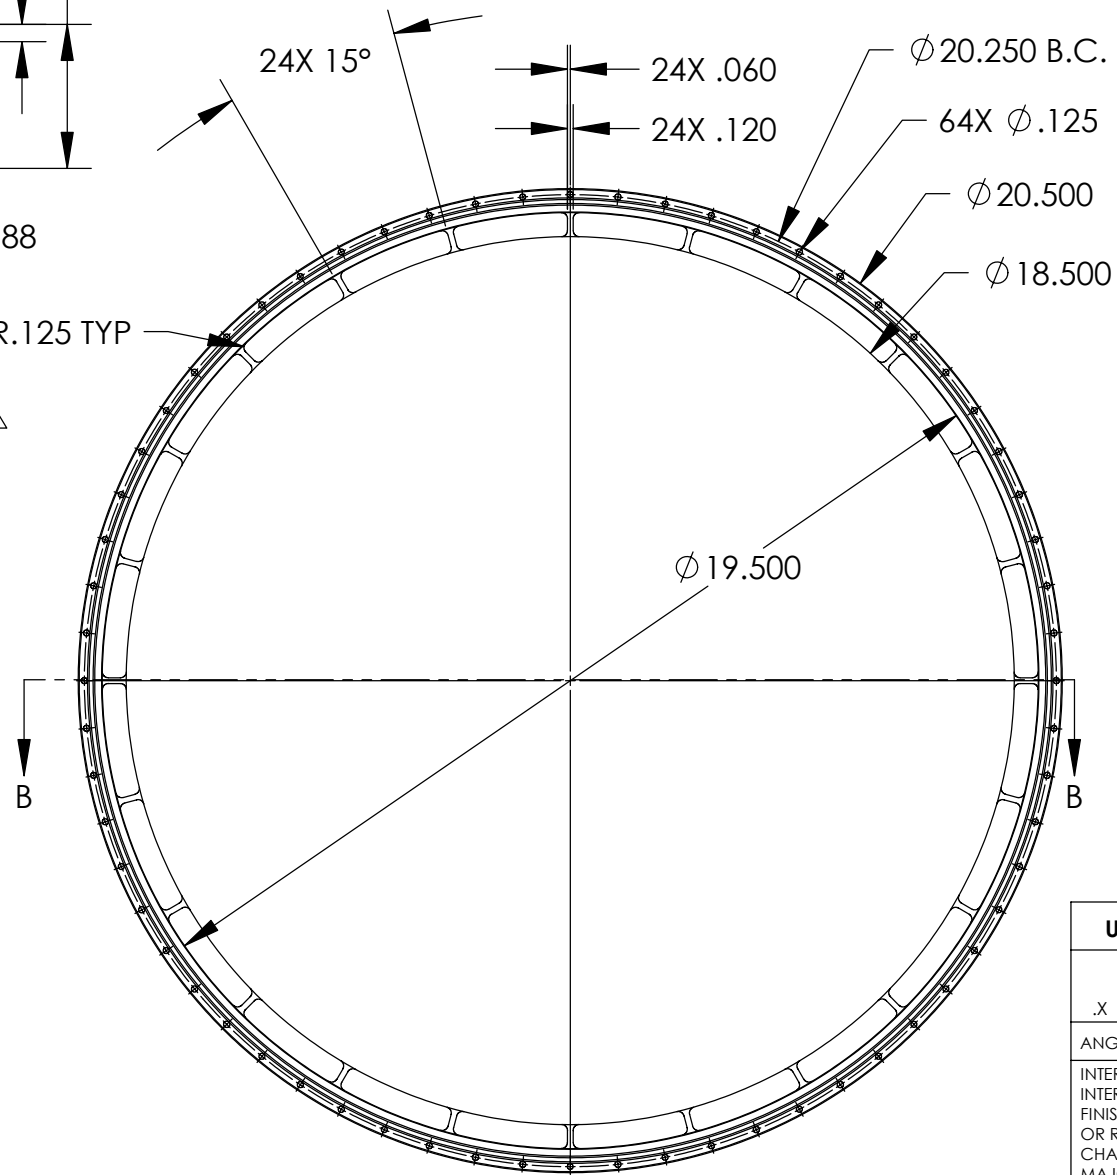

SECTION B-B
SCALE 1 : 4

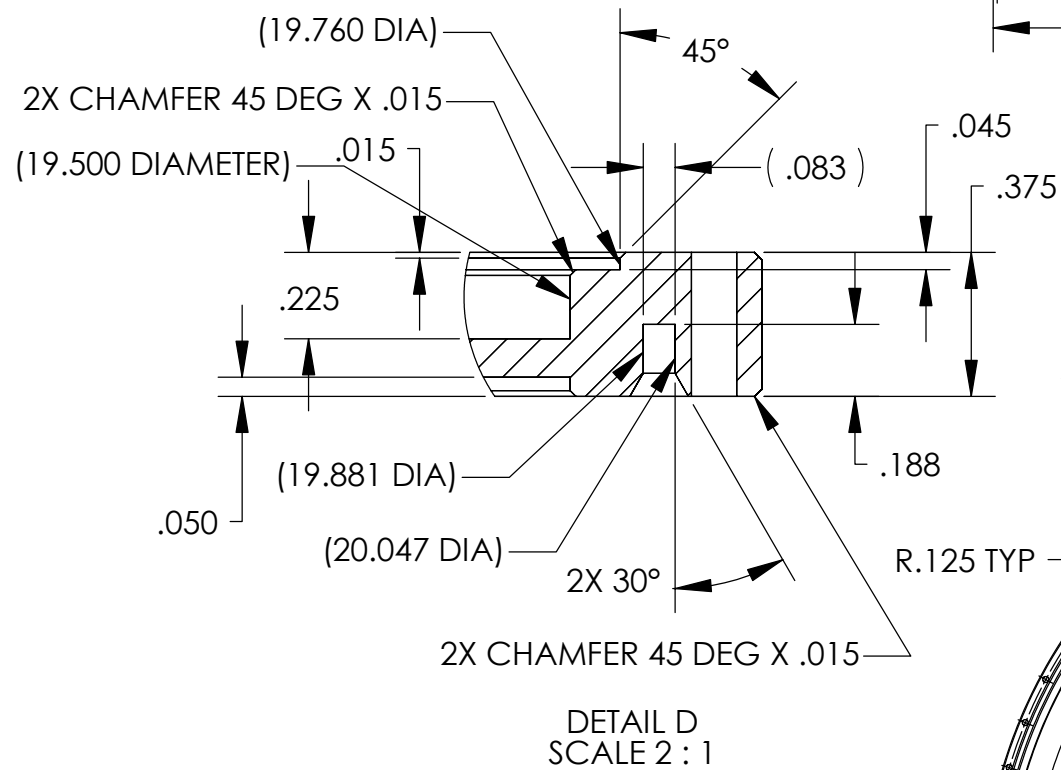

NOTES:
1. THIS PART IS SIMILAR TO P/N P02101-160.
2. WEBBED CENTER TO BE REMOVED POST BRAZING.

| | | | | | | |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|------------|--------------|---------------------|
| UNLESS OTHERWISE SPECIFIED: | | <div>High Precision Devices</div> <div>1668 Valtec Lane, Suite C, Boulder, Colorado 80301</div> <div>Phone: (303) 447-2558 Fax: (303) 447-2548 Web Site: www.hpd-online.com</div> | | | | |
| DIMENSIONS ARE IN INCHES DECIMAL TOLERANCES: .X ±.030 .XX ±.015 .XXX ±.005 | | | | | | |
| ANGULAR TOL: ± 1° SURFACE ROUGHNESS $\sqrt{32}$ | | | | | | |
| INTERNAL AND EXTERNAL SURFACE INTERSECTIONS SHALL BE UNIFORMLY FINISHED WITH CHAMFER .005/.010 X 45° OR RADIUS .005/.010. CHAMFER ALL THREADED HOLES 110% OF MAJOR DIAMETER X 45° | | TITLE: <div>p02101-067 Ln2 Shield can flange</div> | | | | |
| MATERIAL: <div>3003 Aluminum</div> | | CONFIGURATION: 0-Default | | | | |
| FINISH: <div>N/A</div> | | SIZE <div>B</div> | QTY PER ASSM: 1 | SCALE: 1:4 | SHEET 1 OF 1 | REV <div>C</div> |
| | | DATE: <div>5/17/2004</div> | DRAWN BY: C. Danaher | | | |