


REVISIONS			
ZONE	REV	DESCRIPTION	DATE
	B	ADDED #6-32 HOLES TO BOTTOM	4/20/2003
	C	Changed O-ring groove depth	12/29/2003

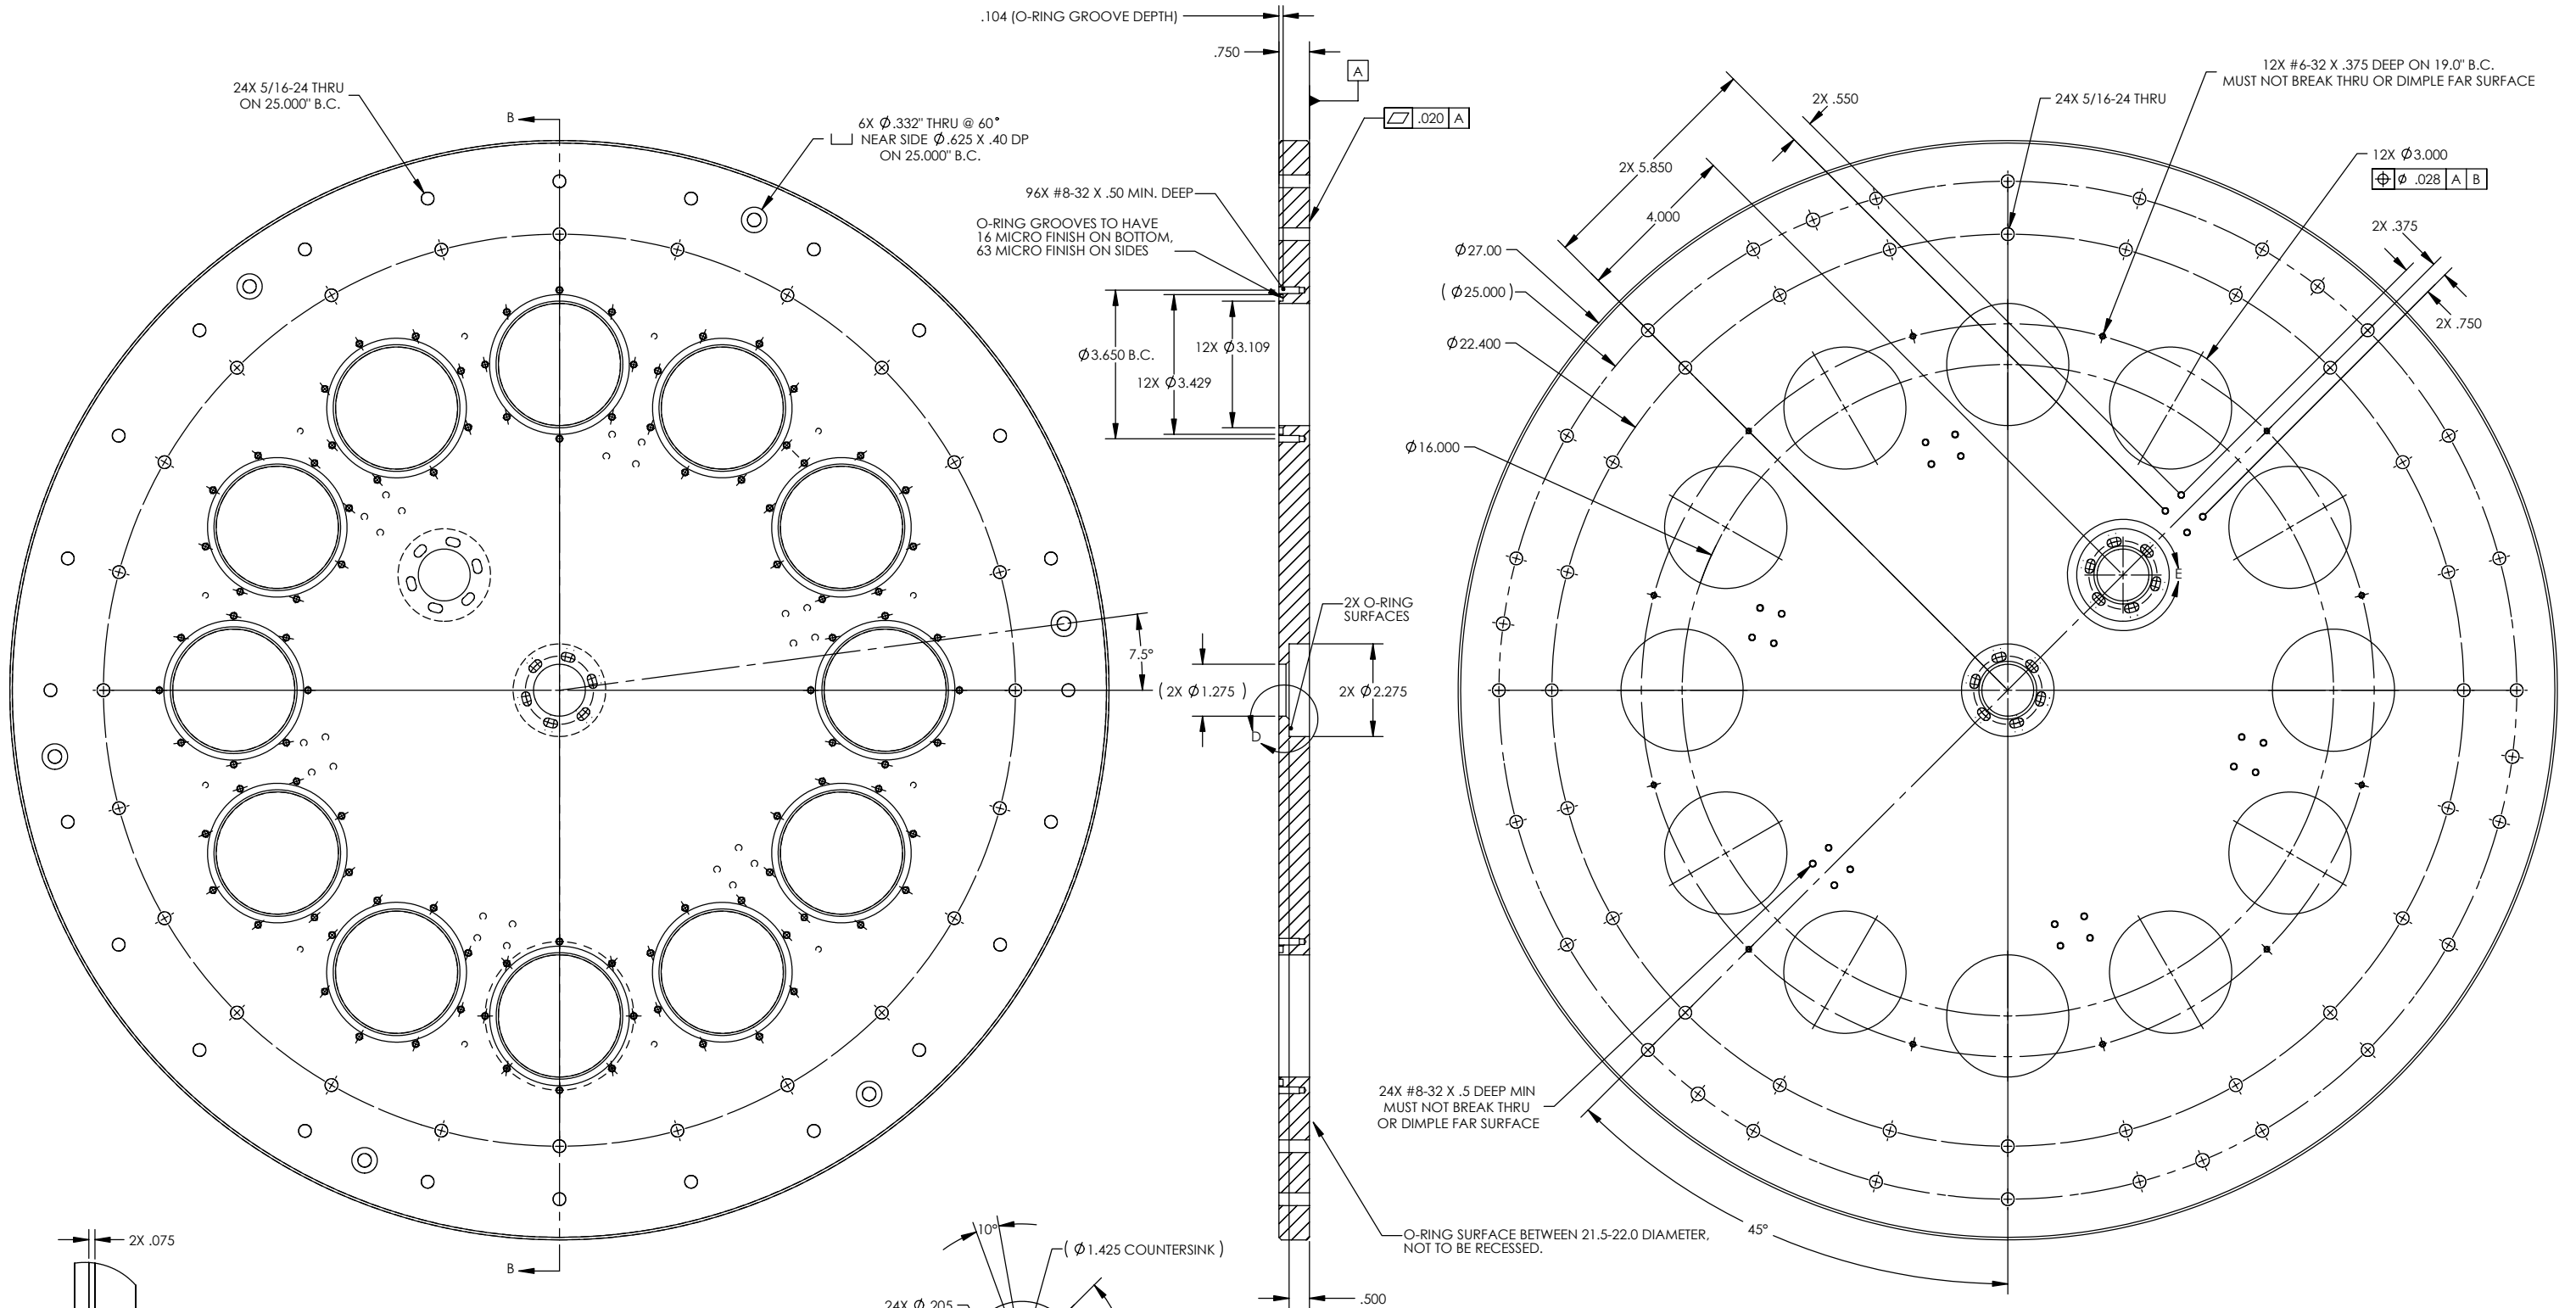

UNLESS OTHERWISE SPECIFIED:		DIMENSIONS ARE IN INCHES	
DECIMAL TOLERANCES:		X $\pm .030$ XX $\pm .015$ XXX $\pm .005$	
ANGULAR TOL: $\pm 1^\circ$ SURFACE ROUGHNESS: $\sqrt{\quad}$		INTERNAL AND EXTERNAL SURFACE INTERSECTIONS SHALL BE UNIFORMLY FINISHED WITH CHAMFER .005/.010 X 45° OR RADIUS .005/.010. CHAMFER ALL THREADED HOLES 110% OF MAJOR DIAMETER X 45°	
MATERIAL: 304 Stainless Steel		FINISH: None	
TITLE: p02101-068 top flange		CONFIGURATION: 00-Default	
SIZE: D		QTY PER ASSM: 1	SCALE: 1:2
DATE: 5/4/2004		DRAWN BY: C. Danaher	REV: C