



REVISIONS		
REV	DESCRIPTION	DATE
B	CHANGED THE 8 #4-40 TO THRU HOLES	3/19/2004

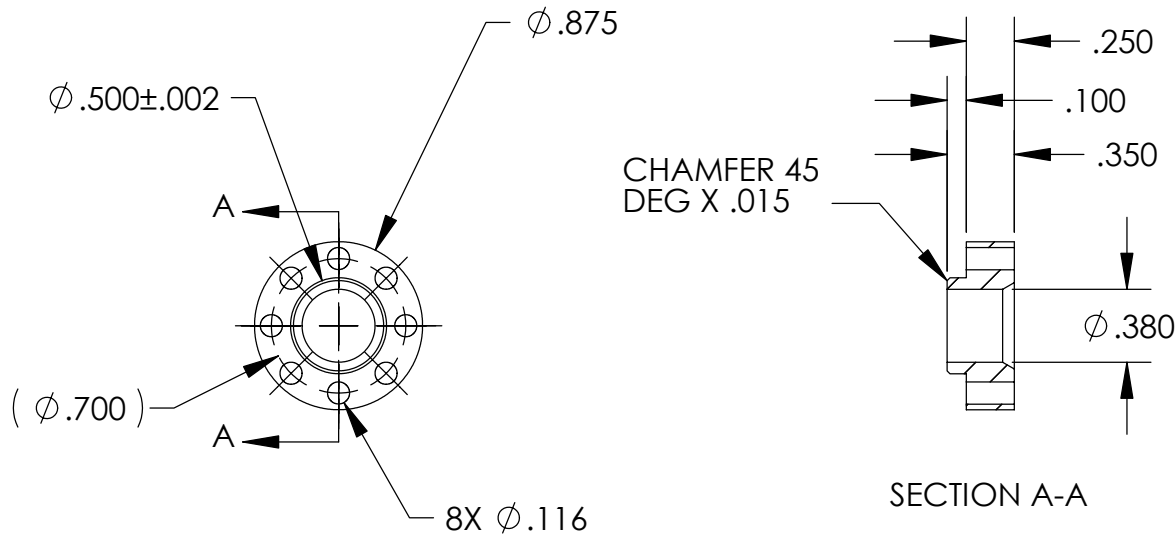

NOTES:  
 1. .380 BORE TO FIT BELLOWS END.  
 2. MAKE FROM PLATE OR TUBE/PIPE.

UNLESS OTHERWISE SPECIFIED:						<div>High Precision Devices</div> <div>1668 Valtec Lane, Suite C, Boulder, Colorado 80301 Phone: (303) 447-2558 Fax: (303) 447-2548 Web Site: www.hpd-online.com</div>					
DIMENSIONS ARE IN INCHES DECIMAL TOLERANCES: .X ±.030 .XX ±.015 .XXX ±.005											
ANGULAR TOL: ± 1° SURFACE ROUGHNESS:√63/											
INTERNAL AND EXTERNAL SURFACE INTERSECTIONS SHALL BE UNIFORMLY FINISHED WITH CHAMFER .005/.010 X 45° OR RADIUS .005/.010. CHAMFER ALL THREADED HOLES 110° OF MAJOR DIAMETER X 45°						TITLE: <div>p02101-130 indium flange</div>					
						CONFIGURATION: 00-Default					
						MATERIAL: 304 SST		SIZE	QTY PER ASSM: 1	SCALE: 1:1	SHEET 1 OF 1
FINISH: N/A		A	DATE: 5/20/2004	DRAWN BY: C. Danaher							